


ANSI/ISEA 107-2015: SUMMARY

GARMENT TYPE DESIGNATION	TYPE "O" OFF-ROAD	TYPE "R" ROADWAY	
PERFORMANCE CLASS	CLASS 1	CLASS 2	CLASS 3
BACKGROUND MATERIALS	217 IN ²	775 IN ²	1240 IN ²
REFLECTIVE MATERIAL AMOUNTS	155 IN ²	201 IN ²	310 IN ²
WIDTH MINIMUMS OF REFLECTIVE MATERIAL	1"	1.38" (1" FOR SPLIT TRIM DESIGNS)	2" (1" FOR SPLIT TRIM DESIGNS)
PREVIOUS STANDARD AND CLASS	ANSI 107, CLASS 1	ANSI 107, CLASS 2	ANSI 107, CLASS 3
WORK ACTIVITY	WAREHOUSING, FARMING, MINING, TRUCKING, AVIATION, CONSTRUCTION, PETROCHEMICAL		HIGHWAYS, D.O.T.

ANSI/ISEA 107-2015 IS PUBLISHED BY THE INTERNATIONAL SAFETY EQUIPMENT ASSOCIATION (ISEA). WWW.SAFETYEQUIPMENT.ORG . USED BY PERMISSION.
NOTE: CONSULT THE ANSI/ISEA 107-2015 CURRENT STANDARD.

SHIRT


Shoulder area trim provides human form definition, and 180° visibility of the wearer



Horizontal retroreflective trim placed at > 2" from bottom garment hem, provides 360° of visibility to the wearer

COVERALL

Separation between bands must be at least 2"

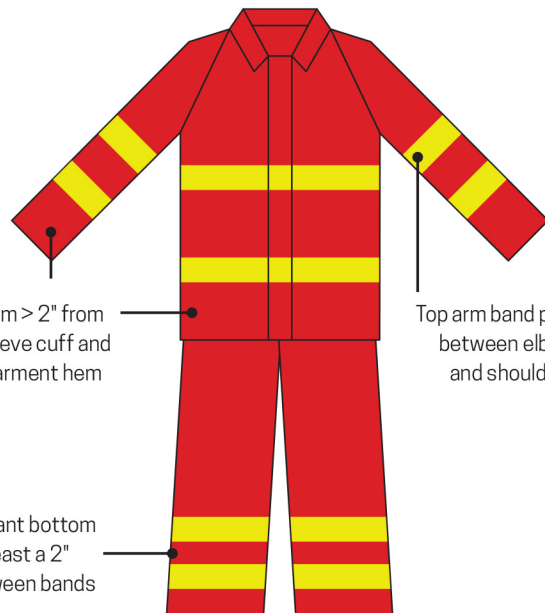

Trim > 2" from sleeve cuff and garment hem

Top arm band placed between elbow and shoulder

Trim > 2" from pant bottom hem and at least a 2" separation between bands